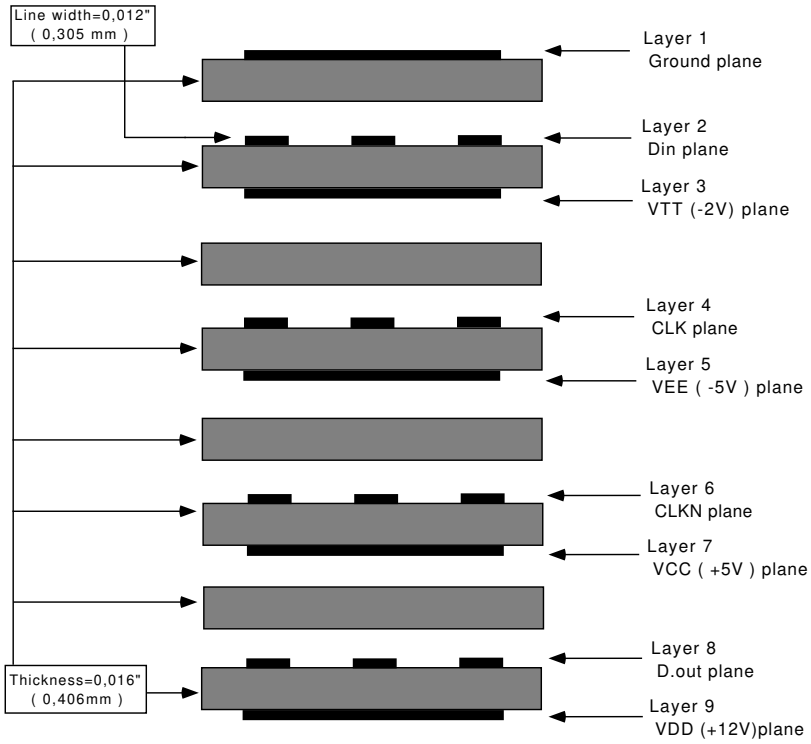Lines that require controlled impedance are placed on layers 2, 4, 6 and 8. The other planes are used for gnd and low voltage.